






Date	UK (English)	CRASH TEST APPROVED
User	Company stamp	Folding frame wheelchair
End user weight (kg)		£ 2000,00
Language user manual	Responsible	Retail price - VAT not included

Wheelchair measures - The tolerance on all the dimensions indicated and/or required is ± 10 mm	
Seat width (LS) ☐ 33 ☐ 36 ☐ 39 ☐ 42 ☐ 45 ☐ 48	
The seat width is measured from the outer sides of the frame	
For seat enlargement see section enlargement of mudguard and armrest with integrated mudguard	
Seat depth (PS) ☐ 35 ☐ 37,5 ☐ 40 ☐ 42,5 ☐ 45 ☐ 47,5	
Footplate distance (DP)	(cm) ± 0.5 cm - adjustment steps 1.5cm
(Real distance between seat and footplate) - IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)	
Setting	☒ Standard ☐ Prudential ☐ Active ☐ Extreme
Backrest Height (TS)	Std.Value 36 (min 30-max 54) adjustment steps 1.5cm
Crossbrace (black)	☒ Single ☐ Double (Not seat width 33-36)
Front height (STD 49) - Rear height (STD 44)	

SAFETY	
☐ 4 points tie-down system rings	
NOT AVAILABLE WITH: Aluminium frame DYNAMIC 2.0 - Titanium frame T MAX	
(installation must be carried out by the manufacturer)	
A head restraint suitable for transportation must be available and fitted accordingly during transportation.	
	08654 203,00

Rear frame	
Aluminium frame	 ☒ Aluminium standard frame - Same colour of front frame The real seat depth, from the front part of the seat cloth to the backrest tube will be 1 cm more than the declared one. camber ☒ 0° ☐ 1,5° ☐ 3°
	 ☐ Aluminium frame DYNAMIC 2.0 - (COLOUR: BLACK) 09955 337,00 The real seat depth, from the front part of the seat cloth to the backrest tube will be 1,5 cm more than the declared one. With rake adjustable backrest ($\pm 9^\circ$) Exclude the installation of : Brake handles for companion (Drum Brake) - 4 points tie-down system rings camber ☒ 0° ☐ 1,5° ☐ 2° ☐ 4°
Titanium frame TMAX	 Titanium frame T MAX 03940 398,00 The real seat depth, from the front part of the seat cloth to the backrest tube will be 1 cm more than the declared one. Brushed Titanium frame - not varnished Weight reduction approx. 250gr Exclude the installation of : 4 points tie-down system rings camber ☒ 0° ☐ 1,5° ☐ 3°

Front frame	Frame Angle			
☐ Short frame - Ideal with Seat depth (PS) 35 - 37,5 Not available for depth 45 - 47,5		☒ 110°	☐ 120°	☐ 95°
☐ Medium frame - Ideal with Seat depth (PS) 40 - 42,5 Not available for depth 47,5				
☐ Long frame - Ideal with Seat depth (PS) 45 - 47,5				
☐ Elevating front frame, swing away and removable Include calf supports and plastic footrest with heel band (not available for seat width 33) Minimum footplate distance 25cm.				09730 270,00

Frame colour	
Frame colour (without extra charge)	
☒ Opaque black	☐ Tekno anthracite
☐ POLAR white	☐ Matt Midnight blue
	☐ Matt grey
	☐ Matt red
Frame colour on request	
☐ Bright silver	☐ Bright fuchsia
☐ Bright blue	☐ Bright lime
	☐ Bright blue china
	☐ Bright red
	12579 109,00

Backrest
☒ Adjustable velcro straps and padded transpiring upholstery

Date Order User Address

Handle tube

☆ Tubes with standard handle

☐ Folding handles

Not available with: Push handles for companion, Brake handles for companion (Drum Brake)



02958

270,00

Colour set: Includes rear wheel hub and rim, rear wheel plates and front forks

Only standard Progeo 22"/24" wheels have coloured hubs and rims

☆ Black	22" 24" 25" 26"		
☐ Bright silver	22" 24"	00833	135,00
☐ Bright lime	22" 24"	00833	135,00
☐ Bright blue	22" 24"	00833	135,00
☐ Bright red	22" 24"	00833	135,00
☐ Bright fuchsia	22" 24"	00833	135,00
☒ POLAR white	22" 24"	00833	135,00
☐ Tekno anthracite	22" 24"	00833	135,00
☐ Matt Midnight blue	22" 24"	00833	135,00
☐ Matt grey	22" 24"	00833	135,00
☐ Matt red	22" 24"	00833	135,00

Casters

☆ 5" Soft

☐ 4" Soft☐ 3" Sport☐ 6" Soft☐ 6" Pneumatic☐ 7" Soft☐ 3" Active Soft (wide)☐ 4" Active Sport (narrow)☐ 4" Active Soft (wide)☐ 5" Active Soft (wide)☐ 5" Pneumatic

Lightest configuration

Not available with frame angle 95°

Not available with frame angle 95°

Not available with frame angle 95°

(Aluminium alloy rim)

(Aluminium alloy rim)

(Aluminium alloy rim)

(Aluminium alloy rim)

06824

95,00

01398

95,00

03943

95,00

07518

95,00

10844

68,00

Rear wheels

☆ 24" Ultra-light Progeo - Standard!

☐ 22" Ultra-light Progeo - Standard!☐ 25" Ultra-light Progeo - Standard!

(colour: black)

☐ 26" Progeo - Standard!

(colour: black)

☐ 24" ULTRA-LIGHT PROGEO KEY SPORT

Lightest configuration

04383

695,00

☐ 24" Ultra-light "Spinergy LX"

01685

695,00

☐ 24" Ultra-light "Spinergy LXL"☐ Black hub and white spokes☐ Hub and spokes black

07846

695,00

☐ 24" Ultra-light "Spinergy Flex rim"

Integrated aluminium/rubber handrim

02270

1.150,00

☐ 25" Ultra-light "Spinergy LX"

02101

695,00

☐ 25" Ultra-light "Spinergy LXL"☐ Black hub and white spokes

07847

695,00

☐ 26" Ultra-light "Spinergy LX"

02102

695,00

☐ 24" Off-road (aluminium handrim black)

01392

270,00

☐ 24" with brake handles for companion (drum brake) (aluminium handrim - Wheel distance 3cm)

03384

386,00

Available only with camber 0°

Not available with Frame Dynamic 2.0

☐ One arm drive - (24" rear wheels Aluminium handrim High pressure Tyre) - camber 0°☐ Right☐ Left

02103

430,00

Rear wheel tyre

☆ High pressure tyre (22"-24"-25"-26") Lightest configuration

☐ High pressure profile tyre (24")☐ Marathon Plus

(24"-25")

with anti-puncture protection

01669

95,00

☐ Anti-puncture - Colour Black

(24")

11083

95,00

Not available with Rear wheels : 24" ULTRA-LIGHT PROGEO KEY SPORT, 24" Ultra-light "Spinergy LXL"

☐ Anti-puncture - Colour Grey

(22")




04181

105,00

Date Order User Address

Handrim	Wheel distance ★ 3 cm (22"-24"-25"-26")	□ 4 cm <i>Lightest configuration</i>		
★ Aluminium				
○ Aluminium black SOFT-TOUCH	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	09170	160,00
○ Chromed Steel	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	01684	160,00
○ Titanium	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00016	290,00
○ Ultra Grepp	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00017	290,00
○ TOP FRICTION Oval countour with a rubber insert	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11023	290,00
○ NOVA H Ergonomic black profile	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11025	290,00
○ NOVA D Ergonomic profile with rubber coating (ideal for quadriplegics)	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11026	290,00
○ Silicon cover for standard aluminium handrim	Available for measures (22" - 24" - 26")		04050	172,00

Wheel locks				
★ Bent lever push to lock				
□ Straight lever push to lock				
□ Straight lever pull to lock				
○ Sport brake			06428	135,00
○ Brake with extension lever push to lock			01949	68,00
○ Brake with extension lever pull to lock			03372	68,00

Footplate (Not available with Elevating front frame, swing away and removable) - See reference tables N°3				
★ Plastic footrest, rake adjustable Not available with Elevating front frame, swing away and removable Minimum footplate distance 27cm.	★ 2/3 Internal	□ 2/3 External		11525
□ One piece footplate - Flip-up! rake and depth adjustable Not available with Elevating front frame, swing away and removable Minimum footplate distance 26cm.	□ Internal	★ 2/3 Internal	□ External	
○ Minimum footplate distance 21cm. Available only with Multi-function and rotative system - 03945				203,00
□ One piece aluminium footplate - Flip-up! rake and depth adjustable Not available with Elevating front frame, swing away and removable Minimum footplate distance 26cm.	□ Internal	★ 2/3 Internal	□ 2/3 External	□ External
				11528
○ One piece Carbon fibre footplate rake adjustable, swing away, flip-up. Not available with Elevating front frame, swing away and removable Minimum footplate distance 26cm.	★ Internal	□ External		03291
				294,00

Mudguard				
Mudguard - FIXED				
★ ABS mudguard				
□ ABS Straight sideguard				03946
○ Carbon fibre mudguard				337,00
○ Carbon fibre Straight sideguard				08918
				337,00
Mudguard enlargement				
★ + 0 cm				
□ + 1 cm	□ + 2 cm	Not available with Rear wheels with brake handles for companion (Drum Brake)		12648
Mudguard - REMOVABLE				
<i>The distance between the two side guards is 1 cm wider than the seat width</i>				
○ Removable ABS mudguard				08921
				135,00
○ Removable ABS fibre straight sideguard				08921
				135,00
○ Removable carbon fibre mudguard				08919
				466,00
○ Removable Carbon fibre straight sideguard				08920
				466,00

Date Order User Address

Armrests

Tubular armrests with standard support combined with anti-tipper wheels exclude the possibility of installing the transit wheels.

- ☐ Tubular armrests (Swing away, removable and height adjustable armrest)
☐ Standard Support (Not with frame Dynamic)
☐ Steel support with safety locking system
- Removable armrest with integrated mudguard**
- ☐ Desk armrests PROGEO (Removable and height adjustable)
 Not available with Frame Dynamic 2.0 + camber 4°
- Enlargement of Desk armrests PROGEO**
☒ + 0 cm
☐ + 2 cm Available only with Ultra-light Progeo standard wheels and camber 0°
- ☐ Flip-up armrests PROGEO (Removable and height adjustable)
 Not available with Frame Dynamic 2.0
- ☐ Removable armrest with ABS straight sideguard
The distance between the two side guards is 1 cm wider than the seat width
- ☐ Removable armrest with carbon-fiber straight sideguard
The distance between the two side guards is 1 cm wider than the seat width

Accessories

- ☐ Pad for front frame protectors 07058 **56,00**
- ☐ Backrest-seat connection cloth 10241 **25,00**
- ☐ Removable storage bag (with quick coupling) 09811 **135,00**

Optional 1

- ☐ Transit wheels 00836 **158,00**
- ☐ Anti-tipper with rapid hookup (inside rotation to reduce the encumbrance)
☐ Right 00023 **145,00**
☐ Left 00024 **145,00**
- ☐ Tipping aid ☐ Right 00025 **79,00**
☐ Left 01046 **79,00**
- ☐ Crutches support ☐ Right 00838 **79,00**
☐ Left 00837 **79,00**

Optional 2

- ☐ Tetraclip (Quick release axle for quadriplegic) 03947 **189,00**
- ☐ Rear wheels plate extension (Not with frame Dynamic 2.0) 01950 **189,00**
☐ Handybike adaptor 00506 **96,00**
- ☐ Push handles for companion (Removable and height adjustable) 01048 **203,00**
- ☐ Harness 04103 **145,00**
☐ Safety pelvic belt 03972 **68,00**
- ☐ Tray table (removable) 00508 **294,00**
- ☐ Lumbar support (to insert in the backrest upholstery) 00013 **43,00**
- ☐ Super Head rest (Folding with the wheelchair) 04049 **486,00**
- ☐ Swing away lateral support ☐ Right 02097 **270,00**
 Not available with Posture backrest PHYSIO ☐ Left 02098 **270,00**
- ☐ Spoke guards Black (22"-24") 01043 **158,00**
☐ Spoke guards Transparent (22"-24") 00835 **158,00**
☐ Spoke guards Progeo design (22"-24") 00019 **189,00**

Additional Kit

- ☐ 24" Off-road rear wheels Off-Road tyre - aluminium handrim (black colour) 03378 **534,00**
- ☐ 24" FAT rear wheels FAT tyre 3" - aluminium handrim (black colour) 09357 **895,00**

Date.....Order.....User.....Address.....

Removable with quick release
Suitable for tubes with diameter 18÷26mm
Depth adjustment (4cm)
Angle adjustment (±18°)

☐ **AIR** Carbon shell
not available for seat width 48

BACKREST HEIGHT		28		34		40	
Shell's shape 		Lateral retaining wing A=high - R=regular					
		A	R	A	R	A	R
							
		☐	☐	☐	☐	☐	☐

1.121,00

☐ **POSTURE** Aluminum shell

BACKREST HEIGHT	34	40	52
Shell's shape 	Lateral retaining wing R=regular		
	R	R	R
	☐	☐	☐

1.085,00

Alluminum lateral with padded, breathable upholstery.



Small (h 13cm)



☐ Right
10272

49,00

☐ Left
10272

49,00

Large (h 20cm)



☐ Right
10273


49,00

☐ Left
10273

49,00

SWING AWAY - Lateral support

Fixing and adjustment hardware complete with protection sleeve
Alluminum lateral with padded, breathable upholstery.

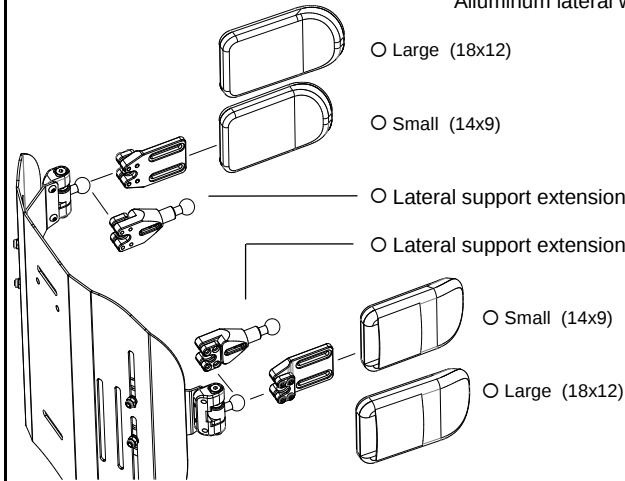

☐ Large (18x12)

05647 196,00

☐ Small (14x9)

05643 196,00

☐ Lateral support extension

Quantity (number pcs).....
10271 74,00

☐ Lateral support extension

Quantity (number pcs).....

☐ Small (14x9)

05642 196,00

☐ Large (18x12)

05646 196,00

☐ Headrest adjustable - Double ball mounting system
Available only with backrest Physio Posture

☐ Large (34x14)
☐ Small (28x14)



05648 385,00

Permobil Limited Unit 7, Polaris Centre, 41 Brownfields, Welwyn Garden City, Herts, AL7 1AN United Kingdom - Phone: +44 1484 722888




Date Order User Address

Note

customer_support_uk@permobil.com - https://www.permobil.com/en-gb

REFERENCE TABLES

1	Front height	
With closed frame (95°) max 5" caster		
Casters	Front height	
	min.	max
3"	41	52
4"	42	53
5"	44	54
6"	48	55
7"	50	56
The size of the fork will be defined only by Progeo in accordance with wheelchair final configuration.		

2	Rear height				
Rear frame		Rear wheels			
		22"	24"	25"	26"
STANDARD	Straight plate 	min. 37 max 45	min. 39 max 47	min. 40 max 48	min. 41 max 49
	Shaped plate 	min. 36 max 49	min. 38 max 51	min. 39 max 52	min. 40 max 53
	Rear wheels plate extension 	min. 37 max 46	min. 39 max 48	min. 40 max 50	min. 41 max 51
	with Tubular armrests 	min. 39 max 46	min. 41 max 48	min. 43 max 50	min. 44 max 51
DYNAMIC 2.0		min. 36 max 49	min. 38 max 51	min. 39 max 52	min. 40 max 53

3	Footplate option	Frame Angle 110°	Footplate distance Frame Angle 120°	Frame Angle 95°
	Plastic footrest	min. 27	min. 27	min. 27
	One piece footplate - Flip-up!	min. 24	min. 26	min. 24
	One piece footplate - Flip-up! , with multifunction rotative system	min. 19	min. 21	min. 19
	One piece aluminium footplate - Flip-up!	min. 24	min. 26	min. 24
	One piece Carbon fibre footplate	min. 24	min. 26	min. 24
Calculated with the best configuration and with the footplates positioned on inside.				
IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)				

4	Rear wheels	
	Model	Features
	22" Ultra-light Progeo - Standard!	(not available in anthracite color)
	24" Ultra-light Progeo - Standard!	(available for all colours)
	24" ULTRA-LIGHT PROGEO KEY SPORT	(silver hub, black rim and 16 spokes)
	24" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	24" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes) - (black hub, rim and 18 spokes)
	24" Ultra-light "Spinergy Flex rim"	(silver hub, black rim and spokes) - (integrated aluminium/rubber handrim - encumbrance reduction up to 3cm. - all tyre)
	24" Off-road	(colour: black) - (aluminium handrim - tyre Off-road)
	25" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	25" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes)
	26" Progeo - Standard!	(colour: black)
	26" Ultra-light "Spinergy LX"	(silver hub, black rim and 18 spokes)