



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com

Little Wave XP

Company:

Ship To:

Account Number:

Date:

Address:

Quote: PO Number:

City:

State:

ATP:

Zip:

Phone:

Marked For:

Email/Fax:

Associated Quote/Order#:

Effective: 5/5/2025

Little Wave XP [TLXP] £3300

Little Wave Width Growable Frame 165 lb weight capacity Maximum Seat Width of 19"

Frame

Seat Width

10" [TLSWT010]	N/C
11" [TLSWT011]	N/C
12" [TLSWT012]	N/C
13" [TLSWT013]	N/C
14" [TLSWT014]	N/C
15" [TLSWT015]	N/C
16" [TLSWT016]	N/C

Seat Depth

10" [TLSDE010]	N/C
11" [TLSDE011]	N/C
12" [TLSDE012]	N/C
13" [TLSDE013]	N/C
14" [TLSDE014]	N/C
15" [TLSDE015]	N/C
16" [TLSDE016]	N/C

Sling Position

In Performance Position (0"), sling is at front of frame. The 1" or 2" sling position extends the frame in front of the sling by that amount. See reference C on page 7.

0" (Performance) [TLSP01]	N/C
1" [TLSP03]	N/C
2" (Classic) [TLSP02]	N/C

Transit Option

Transit System [TLTRNOPT]	N/C
125 lb maximum weight capacity	
Omit [TLTRNOP2]	N/C

Adjustable Depth

Adds the capability to grow seat in depth

No Rear Adjustment [TLAD05]	N/C
1/2" [TLAD06]	N/C
1" [TLAD01]	N/C
2" [TLAD02]	N/C
3" [TLAD03]	N/C

Long Sling

Available only with 1", 2" and 3" Adjustable Depth

Long Sling [TLAD04]	N/C
Sling will be maximum 2" longer than seat depth	

Seat Option

Standard Seat Sling [TLSS001]	N/C
Aluminum Solid Seat Pan [TLACC004]	£273
Seat Pan is 1" longer when Long Sling option is selected	

Front Frame Bend

Angle between front seat tube and ground. See reference D on page 7.

90° [TLFA01]	N/C
85° [TLFA03]	N/C
80° [TLFA02]	N/C
75° [TLFA04]	N/C
70° [TLFA05]	N/C

Backrest

Back Post / Height Range / Back Height							
Back	Price	Height	Back Height				
Height Adjustable	N/C	Short [TLBOP025]	11" ²	12"	13"	14"	
		Medium [TLBOP026]	13"	14"	15"	16"	17"
		Tall [TLBOP027]	17"	18"			
Fixed Height ¹	N/C	Fixed Straight [TLBOP011]	9" ²	10" ²	11" ²	12" ²	13"
			14"	15"	16"	17"	18"
Offset ¹	N/C	Offset [TLBOP022]	11" ²	12" ²	13" ²	14" ²	15"
			16"	17"			

¹ Fixed Height. Adjustable Height Rigidizer Bar Included.² Not available with Fold Down Push Handle

Offset Back Post Option

Selection required with Offset Back Posts. Not available with Height Adjustable or Fixed Height Back Posts. Each back post is offset 1" creating 2" overall offset.

2" Inward Offset [TLOBO001] N/C

2" Outward Offset [TLOBO002] N/C

Not available with Swing Away Armrests

Push Handle

Omit Push Handle [TLBCK008] N/C

Standard Push Handle [TLBCK004] N/C

Not available on Offset Back Posts with 11" - 14" Back Heights

Bolt-On Push Handle [TLBOP005] £209

Handles will be 1" - 2" above back height

Fold Down Push Handle [TLBCK006] £189

Stroller Handles

Stroller Handles are removable and height adjustable

Ergo Stroller Handle [TLBCK009] £209

Single Stroller Handle [TLBOP007] £189

Double Stroller Handle [TLBOP006] £251

Not available with Push Handles or 10" Seat Width

Back Upholstery

Available only with Height Adjustable Back Posts. If selecting both upholstery and Axiom Back, the upholstery will be installed.

Padded Velcro Adjustable with Standard Cover [TLBUP001] N/C

Padded Velcro Adjustable with Air Mesh Breathable Cover [TLBUP006] £84

Not available on chair widths less than 12"

Tension Adjustable with Standard Cover [TLBUP002] N/C

Tension Adjustable with Air Mesh Breathable Cover [TLBUP007] £209

Not available on chair widths less than 12"

Omit [TLBUP003] N/C

Front Seat Height and Casters

Caster Size / Footrest Taper / Front Seat Height

Select Front Seat Height and Footrest Taper in row corresponding to desired Caster Size. 6" Casters not available with Seat Depths less than 13".

Footrest Taper indicates bend of front frame creating footrest width. Taper is measured from outside of seat frame to outside of front tube. Taper is not available with 70° Front Frame Bend. See reference E on page 7.

Front Seat Height is measured from floor to top of seat tube at front of seat sling. Adjustable up or down by 1/2". See reference F on page 7.

Footrest Taper	Caster Size	Front Seat Height														
No Taper (Straight) [TLF]	3"	11.5"	12"	12.5"	13"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"
	4"	12.5"	13"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"
	5"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"
	6"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"	
1" Taper [TLFT01]	3"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"		
	4"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"				
	5"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"						
	6"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"							

Casters

		Caster Size				
		Price	3"	4"	5"	6"
Caster Type	.75" Rollerblade	N/C	[TLCAS002]	[TLCAS004]		
	.75" Lighted Rollerblade	£93	[TLCAS001]	[TLCAS005]	[TLCAS033]	
	1.25" Soft Roll	N/C		[TLCAS006]	[TLCAS010]	[TLCAS014]
	1" Poly Aluminum	£112		[TLCAS007]	[TLCAS011]	
	1" Pneumatic	£118				[TLCAS017]
	1.5" Soft Roll	N/C		[TLCAS032]	[TLCAS025]	[TLCAS026]
	1.5" Soft Roll Aluminum	£112	[TLCAS003]	[TLCAS009]	[TLCAS013]	[TLCAS016]

Fork Options

Standard Fork [TLFRK001]	N/C
Single Sided Fork [TLFRK002]	£139
<i>Not available with 6" Casters</i>	
Frog Legs II Suspension System [TLCST014]	£488

Footrest

Footplates

Tubular "Open" Footplate [TLFPL004]	N/C
<i>Not available with footrest widths less than 9.5". See Reference G on page 7.</i>	
Tubular Footplate with ABS Cover [TLFPL005]	£99
<i>Not available with footrest widths less than 9.5". See Reference G on page 7.</i>	
Aluminum Angle Adjustable [TLFPL006]	£174
Aluminum Angle Adjustable with Riser [TLFPL007]	£174
High Mount Aluminum Angle Adjustable [TLFPL008]	£174
Angle Adjustable Flip Under [TLFPL012]	N/C
<i>Not available with footrest widths less than 9.5". See Reference G on page 7.</i>	
High Mount Angle Adjustable Flip Under [TLFPL011]	£313

Seat to Footrest Length

See reference H on p.7 should be at least 2.5" shorter than FSH

5.5"	6"	6.5"	7"	7.5"	8"
8.5"	9"	9.5"	10"	10.5"	11"
11.5"	12"	12.5"	13"	13.5"	14"
14.5"	15"	15.5"	16"	16.5"	17"

Rear Seat Height and Wheels

Wheel Size / Rear Seat Height

Select Rear Seat Height in row corresponding to desired Wheel Size. For proper setup, selection is required when omitting rear wheels. Measured from floor to top of seat tube at front of back post. Rear Seat Height is custom to needs. See reference I on page 7.

Wheel Size	Rear Seat Height															
18"	11.5" ¹	12"	12.5"	13"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"
20"	12.5" ¹	13"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"
22"	13.5" ¹	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"		
24"	14.5" ¹	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"				

¹ Available only with Low Profile tires

Wheels

		Rear Wheel Size				
		Price	18"	20"	22"	24"
Rear Wheel	MAXX Spoke	N/C	[TLWH1118]	[TLWH1120]	[TLWH1122]	[TLWH1124]
	Mag	£139		[TLWH1220]	[TLWH1220]	[TLWH1224]
	Spinergy Spox	£480		[TLWHE420]	[TLWHE422]	[TLWHE424]

Spinergy Options

Select spoke color and handrim tab for Spinergy wheels

Black Spokes [TLSSC001]	N/C
Red Spokes [TLSSC002]	Blue Spokes [TLSSC005]
White Spokes [TLSSC003]	£105

Rear Tire Type

Full Poly 1 3/8" [TLTIR002]	N/C
Low Poly 1" [TLTIR003]	N/C
Pneumatic with Airless Insert [TLTIR004]	£127
Street Pneumatic 1 3/8" [TLTIR001]	N/C
High Pressure 1" [TLTIR006]	N/C
<i>Not available on Mag wheel or 18" wheel size</i>	
Schwalbe Marathon Plus Evolution 1" [TLTIR010]	£127
<i>Available only on 24" MAXX Spoke or Spinerigy wheels</i>	

Handrims

Standard Handrims

Aluminum Anodized [TLHRM001]	N/C
Plastic Coated [TLHRM002]	£139
Projection (8 Vertical Projections) [TLHRM003]	£313
<i>Available only with full profile tires in combination with 22", 24", and 26" MAXX Spoke wheels, or 22" and 24" Mag wheels</i>	
Omit Handrim [TLHRM012]	N/C

Ergonomic Handrims

Not available with 20" or 26" wheels

Ergo Lite Regular Grip [TLHRM005]	£313
Ergo Standard Regular Grip [TLHRM008]	£313
Ergo Lite Extra Grip [TLHRM006]	£313
Ergo Standard Extra Grip [TLHRM009]	£313
Ergo Lite Omit Grip [TLHRM004]	£313
Ergo Standard Omit Grip [TLHRM007]	£313

Handrim Options

Handrim Mount

If no selection is made, Standard Mount will be used. Reduces overall width by .75.

Close Mount [TLTAB001]	N/C
3M Micro Grip [TLACC006]	£105
<i>Not available on Plastic Coated or Projection Handrims</i>	

Wheel Locks

Wheel Lock

Push to Lock [TLWLK002]	N/C
Pull to Lock [TLWLK003]	N/C
Low Profile Scissor Lock [TLWLK012]	£63
Drum Brake [TLWLK015]	£612
<i>Available only with 20", 22" and 24" MAXX Spoke wheels. Not available with Fold Down Push Handles or Ergo and Single Stroller Handles without integrated push handles. Axle is Quick Release.</i>	
Dual - Drum Brake with Push to Lock [TLWLK016]	£751
<i>Available only with 20", 22" and 24" MAXX Spoke wheels. Not available with Fold Down Push Handles or Ergo and Single Stroller Handles without integrated push handles. Axle is Quick Release.</i>	
Dual - Drum Brake with Pull to Lock [TLWLK017]	£751
<i>Available only with 20", 22" and 24" MAXX Spoke wheels. Not available with Fold Down Push Handles or Ergo and Single Stroller Handles without integrated push handles. Axle is Quick Release.</i>	
Omit [TLWLK008]	N/C

Rear Wheel Spacing

Measured from outside of back to inside of rear tire. Adjustable out 1/2" from setting. 1.5" minimum Rear Wheel Spacing with Height Adjustable T-Arm Armrest, 1.25" minimum with Height Adjustable Pediatric Desk Armrest, 1" minimum with 0° Rear Wheel Camber. See reference K on page 7. No selection needed with Wheelchair Drive Ready option.

0.75" [TLWS075]	1" [TLWS100]	1.25" [TLWS125]	
1.5" [TLWS150]	1.75" [TLWS175]		N/C

Rear Wheel Camber

0° [TLWC00]	2° [TLWC02]	4° [TLWC04]	6° [TLWC06]	
8° [TLWC08]				N/C

Center of Gravity presets

Measured from front of back post to center of rear axle. 0" indicates axle will be directly under back post. See reference J on page 7.

Amputee Positions			
-1.5" [TLCGA150]	-1.25" [TLCGA125]	-1" [TLCGA100]	-.75" [TLCGA075]
-.5" [TLCGA050]	-.25" [TLCGA025]	0" [TLCGS000]	.25" [TLCGS025]
Standard Positions			
.5" [TLCGS050]	.75" [TLCGS075]	1" [TLCGS100]	1.25" [TLCGS125]
1.5" [TLCGS150]	1.75" [TLCGS175]	2" [TLCGS200]	2.25" [TLCGS225]
2.5" [TLCGS250]	2.75" [TLCGS275]	3" [TLCGS300]	3.25" [TLCGS325]
3.5" [TLCGS350]	3.75" [TLCGS375]	4" [TLCGS400]	4.25" [TLCGS425]

Axles

No selection needed with Drum Brake

Quick Release [TLAXO003]	N/C
Quad Quick Release [TLAXO001]	
<i>Not available with Mag or Spinerigy wheels</i>	
	£209

Armrests

Armrest Type	Length		Price
Height Adjustable T-Arm Tall (11.5"-15") ^{1,3}	Desk	[TLARM039]	£306
	Full	[TLARM040]	
Height Adjustable T-Arm (8.5"-13.5") ^{1,3}	Desk	[TLARM003]	£306
	Full	[TLARM004]	
Height Adjustable T-Arm Low (6.5"-10.5") ^{2,3,4}	Desk	[TLARM022]	£306
	Full	[TLARM023]	

1 Not available with Seat Depths less than 13"

2 Not available with Seat Depths less than 12"

3 1.5" minimum Rear Wheel Spacing

4 If requested configuration is unavailable, Standard Height T-Arm will be used

5 Requires Fixed Height Backrest and Adjustable Height Rigidizer Bar

6 Not available with back heights less than 12"

7 Best fit with Seat Depths less than 14"

8 1.25" minimum Rear Wheel Spacing

9 Not available with Arm Pads

10 Not available with Back Heights less than 13"

11 Not available with Offset

12 Not available with Transit System AND more than 2" Adjustable Depth

Armrest Type		Price
Height Adjustable Pediatric Desk (6.5" - 10") ^{7,8}	[TLARM014]	£278
Tubular Flip Up ^{5,9,10,11}	[TLARM015]	£70
Swing Away (8.5"-12.5") ^{9,11,12}	[TLARM002]	£223
Omit Armrests	[TLARM007]	N/C

Arm Pads

Not available with Tubular Flip Up or Swing Away Armrests. Full Arm Pads not available with Height Adjustable Pediatric Desk Armrests.

Standard Arm Pad [TLARM026]	N/C
Waterfall Arm Pad [TLARM020]	£35
Not available with Angle Adjustable Locking Extendable Flip Up Armrests	
Foam Grip [TLARM025]	N/C
Available only with Angle Adjustable Locking Extendable Flip Up Armrest	

Side Guards

Not available with T-Arms or Height Adjustable Pediatric Desk Armrests

Direct Mount Side Guards

Composite Side Guards - Adult - Direct Mount Receiver [TLSDG002]	£161
12" minimum Seat Depth	
Composite Side Guards - Pediatric - Direct Mount Receiver [TLSDG001]	£161

Clamp-On Mount Side Guards

Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver - Black [TLSDG017]	£340
Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver [TLSDG018]	£411
Not available with Hydrographics	

Accessories

5th Wheel

Rotating removable rear caster. See reference L on page 7.

Standard 5th Wheel [TLATP002]	£237
Dynamic 5th Wheel [TLATP004]	£237
Soft Elastomer [TLELA001]	N/C
Both elastomers are included; the selected elastomer will be installed	
Firm Elastomer [TLELA002]	N/C
Both elastomers are included; the selected elastomer will be installed	

Anti-Tip

Rear Anti-Tips [TLATP001]	£244
Omit [TLATP000]	N/C

Calf Strap

Velcro Adjustable [TLACC002]	N/C
Padded Velcro Adjustable [TLACC003]	£77
Padded Airmesh Calf Strap [TLACC010]	£118

Pelvic Positioning Belt

1" Auto Buckle Pelvic Positioning Belt [TLPOB004]	£63
1" Padded Auto Buckle Pelvic Positioning Belt [TLPOB005]	£174
1 1/2" Auto Buckle Pelvic Positioning Belt [TLPOB001]	£63
1 1/2" Padded Auto Buckle Pelvic Positioning Belt [TLPOB002]	£174
Small Flex-Mount Positioning Belt (16-24") [TLPOB007]	£216
Medium Flex-Mount Positioning Belt (19-29") [TLPOB008]	£216
Large Flex-Mount Positioning Belt (25-37") [TLPOB009]	£216

Belt Mounting Kit

Ki Mobility Belt Mounting Clamp [TLACC023]	£43
Belt Mounting Bracket [TLACC013]	£118

Other Accessories

Tool Kit [TLACC005]	£23
Removable Underseat Pouch [TLACC015]	£35
Pediatric Ki Mobility Backpack [TLACC026]	£115
Ki Mobility Backpack [TLACC009]	£115
Best fit on chairs more than 10" wide	
Luggage Carrier [TLACC025]	£84
Black Neoprene Impact Guards [TLIMG001]	£99
Clear Spoke Guards [TLSPG001]	£174
Not available with Mag wheel	
Black Spoke Guards [TLSPG002]	£174
Not available with 18" or 20" wheel sizes or Mag wheel	
Cane and Crutch Holder [TLACC007]	£105



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com

Little Wave XP

Frame Color

Gloss Finish

Touch-up paint is available for purchase through the parts manual

Black [TLFCS001]	N/C
Ruby Red [TLFCS063]	N/C
Radiant Orange [TLFCS056]	N/C
Yellow [TLFCS029]	N/C
Electric Green [TLFCS055]	N/C
Rich Teal [TLFCS061]	N/C
Glacier Blue [TLFCS054]	N/C
Blue Steel [TLFCS051]	N/C
Deep Sapphire Blue [TLFCS065]	N/C
Purple Plum [TLFCS066]	N/C
Opalescent Violet [TLFCS057]	N/C
Dark Pink [TLFCS053]	N/C
Light Pink [TLFCS052]	N/C
Champagne [TLFCS064]	N/C

Matte Finish

Touch-up paint is available for purchase through the parts manual

Shadow Black [TLFCS015]	N/C
Iridescent Navy [TLFCS016]	N/C
Bright Red [TLFCS062]	N/C
Tactical Green [TLFCS058]	N/C
Dry Earth Tan [TLFCS059]	N/C
Platinum [TLFCS050]	N/C
White [TLFCS060]	N/C

References

A. Seat Width *See Diagram 1*

Measured from outside of frame tube on one side to outside of frame tube on other side.

B. Seat Depth *See Diagram 3*

Measured from front of back posts to front edge of seat sling. Seat sling starts at beginning of bend at front of frame.

C. Sling Position *See Diagram 2*

In Performance Position (0°), sling is at front of frame to keep chair shorter and more maneuverable. The 1" or 2" seat sling position extends the frame in front of the sling by that amount. Adding more frame can improve stability and provide support to aid in transfers.

D. Front Frame Bend *See Diagram 3*

Angle between front seat tube and ground.

E. Footrest Taper *See Diagram 1*

Indicates bend of front frame creating footrest. Taper is measured from outside of seat frame to outside of front tube.

F. Front Seat Height *See Diagram 1*

Measured from floor to top of seat tube at front of seat sling.

G. Footrest Width *See Diagram 1*

Measured from inside of front tube to inside of front tube on other side. Footrest width is listed below for each seat width and taper.

Seat Width	Straight	1" Taper
Outside Measurement	2" Narrower than Seat Width	4" Narrower than Seat Width
10"	7.5"	
11"	8.5"	
12"	9.5"	
13"	10.5"	7.5"
14"	11.5"	8.5"
15"	12.5"	10.5"
16"	13.5"	11.5"

H. Seat to Footrest Length *See Diagram 3*

Measured from front edge of seat sling to top rear of footrest. Footrest length of at least 2.5" shorter than front seat height recommended.

I. Rear Seat Height *See Diagram 3*

Measured from floor to top of seat tube at front of back post. Rear seat height is custom to needs.

J. Center of Gravity Preset *See Diagram 3*

Measured from front of back post to center of rear axle. 0° indicates axle will be directly under back post.

K. Rear Wheel Spacing *See Diagram 1*

Measured from outside of seat back to inside of rear tire. Adjustable out .5" from setting.

L. 5th Wheel *See Diagram 4*

Rotating removable 5th wheel allows for aggressive center of gravity positioning of the rear wheels.

Diagram 1

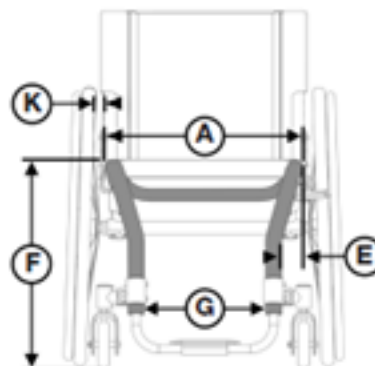


Diagram 2

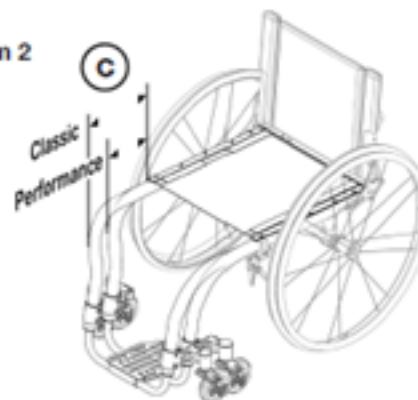


Diagram 3

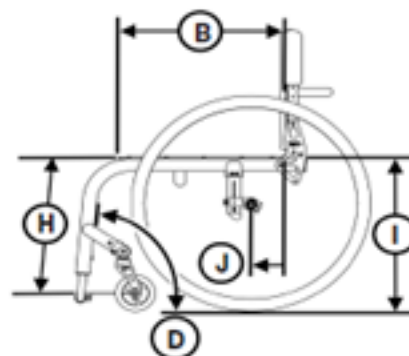


Diagram 4



References

A. Seat Width See Diagram 1

Measured from outside of frame tube on one side to outside of frame tube on other side.

B. Seat Depth See Diagram 3

Measured from front of back posts to front edge of seat sling. Seat sling starts at beginning of bend at front of frame.

C. Sling Position See Diagram 2

In Performance Position (0°), sling is at front of frame to keep chair shorter and more maneuverable. The 1° or 2° seat sling position extends the frame in front of the sling by that amount. Adding more frame can improve stability and provide support to aid in transfers.

D. Front Frame Bend See Diagram 3

Angle between front seat tube and ground.

E. Footrest Taper See Diagram 1

Indicates bend of front frame creating footrest. Taper is measured from outside of seat frame to outside of front tube.

F. Front Seat Height See Diagram 1

Measured from floor to top of seat tube at front of seat sling.

G. Footrest Width See Diagram 1

Measured from inside of front tube to inside of front tube on other side. Footrest width is listed below for each seat width and taper.

Seat Width	Straight	1" Taper
Outside Measurement	2" Narrower than Seat Width	4" Narrower than Seat Width
10"	7.5"	
11"	8.5"	
12"	9.5"	
13"	10.5"	7.5"
14"	11.5"	8.5"
15"	12.5"	10.5"
16"	13.5"	11.5"

H. Seat to Footrest Length See Diagram 3

Measured from front edge of seat sling to top rear of footrest. Footrest length of at least 2.5" shorter than front seat height recommended.

I. Rear Seat Height See Diagram 3

Measured from floor to top of seat tube at front of back post. Rear seat height is custom to needs.

J. Center of Gravity Preset See Diagram 3

Measured from front of back post to center of rear axle. 0" indicates axle will be directly under back post.

K. Rear Wheel Spacing See Diagram 1

Measured from outside of seat back to inside of rear tire. Adjustable out .5" from setting.

L. 5th Wheel See Diagram 4

Rotating removable 5th wheel allows for aggressive center of gravity positioning of the rear wheels.

Diagram 1

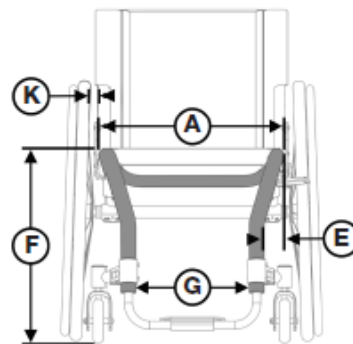


Diagram 2

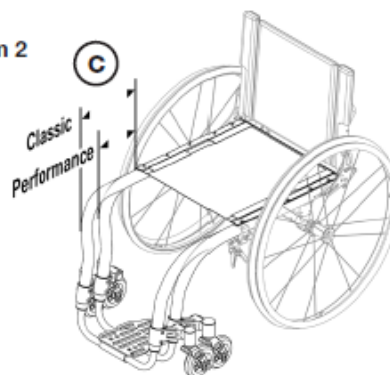


Diagram 3

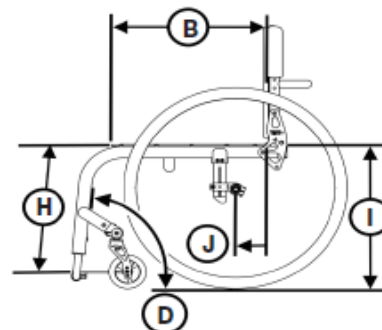


Diagram 4

