

permobil Order Form - Progeo DUKE

Permobil Limited Unit 7, Polaris Centre, 41 Brownfields, Welwyn Garden City, Herts, AL7 1AN United Kingdom - Phone: +44 1484 722888

Date User End user wheight (kg) Language user manual	UK (English) Company stamp Responsible	Rigid frame wheelchair £ 4538,00 Retail price - VAT not included
---	--	--

Wheelchair measures - The tolerance on all the dimensions indicated and/or required is ± 10 mm

Seat width (LS) ☐ 33 ☐ 36 ☐ 39 ☐ 42 ☐ 45 ☐ 48
The seat width is measured from the outer sides of the frame, while the distance between the two side guards is 1.5 cm wider.
 For seat enlargement see section enlargement of mudguard and armrest with integrated mudguard

Seat depth (PS) ☐ 35 ☐ 37,5 ☐ 40 ☐ 42,5 ☐ 45 ☐ 47,5 ☐ 50
The real seat depth, from the front part of the seat cloth to the backrest tube will be 1,5 cm more than the declared one.

Footplate distance (DP) (cm) ±0.5cm - adjustment steps 1.5cm
(Real distance between seat and footplate) - IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)


Setting ☆ Standard ☐ Prudential ☐ Active

Backrest Height (TS) Std.Value 33,5 (min 26-max 47) adjustment steps 1.5cm

Camber ☆ 0° ☐ 2° ☐ 4°

Front frame

☆ Carbon fibre frame, Angle 90° to the seat



Front height - Tick the box with the required height
 The possible difference in height between HIGH frame and LOW frame is 3cm (with same fork, caster and assembly hole).

	 <i>SPORT fork (H95)</i>	 <i>Small size fork (H115)</i>
LOW FRAME 90° Front height (min 44,5 - max 50) Footplate distance (min 34,5) <i>U-TUBE Aluminium footplate</i> Footplate distance (min 18 ÷ max 35) DPmax = Front height - 10cm	Casters 3" ☐ ~45 ☐ ~46 4" ☐ ~46 ☐ ~47 5" ☐ ~48,5	Casters 3" ☐ ~45,5 ☐ ~47 4" ☐ ~46,5 ☐ ~48 ☐ ~49 5" ☐ ~49 ☐ ~50
HIGH FRAME 90° Front height (min 47,5 - max 53) Footplate distance (min 37,5) <i>U-TUBE Aluminium footplate</i> Footplate distance (min 21 ÷ max 38) DPmax = Front height - 10cm	Casters 3" ☐ ~48 ☐ ~49 4" ☐ ~49 ☐ ~50 5" ☐ ~51,5	Casters 3" ☐ ~48,5 ☐ ~50 4" ☐ ~49,5 ☐ ~51 ☐ ~52 5" ☐ ~52 ☐ ~53

The real front-seat height could be slightly different from the chosen one considering it is affected by seat depth and rear seat height.

Rear height **The difference between Font Height and Rear Height must be in the 3 - 12 cm range.**

Rear wheels 22" (min 36 - max 44)
 Rear wheels 24" (min 38 - max 46)
 Rear wheels 25" (min 39 - max 47)
 Rear wheels 26" (min 41 - max 48)

Seat

☆ Seat cloth with pocket (under seat)

☐ Seat with tension straps	08883 240,00
☐ Carbon rigid seat	08336 509,00
☐ Pocket (under seat) [25x11x4,5]	08281 79,00

Date Order User Address

CUSTOMIZE COLORS

①

Fork colour

☆ Opaque black

☐ Bright silver☒ POLAR white☐ Bright red☐ Tekno anthracite☐ Matt grey☐ Bright blue☐ Bright fuchsia☐ Bright lime☐ Matt Midnight blue☐ Matt red

08342

68,00

②

Colour rear wheels

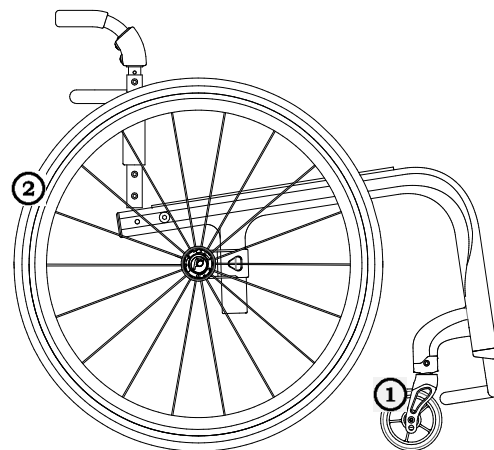
To be matched only with: Rear wheels Ultra-light Progeo - Standard! (22 - 24)

☆ Black

☐ Bright silver☒ POLAR white☐ Bright red☐ Tekno anthracite☐ Matt grey☐ Bright blue☐ Bright fuchsia☐ Bright lime☐ Matt Midnight blue☐ Matt red

04692

68,00



Rear wheels axle

☆ Aluminum rear wheels axle

☐ Carbon fiber rear wheels axle

Lightest configuration

07647

158,00

Backrest adjustment and fixing system

☆ Backrest with double locking (upright and folded)

☐ Backrest with upright locking system ONLY (no locking when folded)☐ Fixed back(non-folding back)

with rake adjustable from -4° to +16°

with rake adjustable from -4° to +16°

with rake adjustable from -4° to +16°

Backrest

☆ Adjustable velcro straps and padded transpiring upholstery

☆ Aluminium backrest

☐ Titanium backrest☐ Carbon fibre backrest

06811

203,00

04389

802,00

○ AIR

Integrated posture backrest (NOT REMOVABLE)


Carbon shell - Lateral retaining 7,5cm

Depth adjustment ±1cm. - Angle adjustment ±10°

not available for seat width 48

Installation on:

☆ Backrest tubes

☐ Aluminium backrest☐ Titanium backrest☐ Carbon fibre backrest

06811

203,00

04389

802,00

H 28	H 34	H 40			
Backrest Height (TS) min 34	Backrest Height (TS) min 38	Backrest Height (TS) min 44			
(.....)	(.....)	(.....)			
Lateral retaining wing A=high - R=regular					
A	R	A	R	A	R
					
☐	☐	☐	☐	☐	☐

Handle tube

☆ Tubes with standard handle

☐ Tubes with short handle☐ SPORT tubes Without push handles☐ Carbon fibre tubes with short handle

Weight reduction approx. 110gr.

04390

158,00

Not available with: Posture backrest PHYSIO - Posture backrest A I R

☐ Folding handles

Not available with: Push handles for companion

Minimum backrest height 30,5cm



02958


270,00

Date Order User Address


Footplate

☆ Aluminium footplate. Rake not adjustable


☆ WITHOUT plastic plate



□ with plastic plate



○ One piece aluminium footplate - Flip-up! FLIP-BACK! - rake and depth adjustable

IMPORTANT NOTICE! From the footplate to the floor minimum 6cm !! (Minimum Front height = DP + 4cm)
With 5" front wheel the difference between Front Height and Rear Height must be greater than 5cm

09420 203,00

○ Aluminium footplate, rake and depth adjustable

☆ Internal □ 2/3 Internal □ External □ 2/3 External



04456 270,00

○ U-TUBE - Aluminium footplate, rake and depth adjustable

LOW FRAME: minimum footplate distance 18 - maximum footplate distance 35


HIGH FRAME: minimum footplate distance 21 - maximum footplate distance 38



09853 240,00

○ One piece Carbon fibre footplate. Rake adjustable

☆ Internal □ External



04110 398,00

Mudguard

☆ Carbon fibre mudguard

□ Carbon fibre Straight sideguard

Mudguard enlargement

☆ + 0 cm

□ + 1 cm

12648

○ Removable version

The distance between the two side guards is 1 cm wider than the seat width



08921 135,00

Casters

☆ 4" Soft

□ 3" Sport

Lightest configuration

□ 5" Soft

○ 3" Active Soft (wide)

(Aluminium alloy rim)

06824 95,00

○ 4" Active Sport (narrow)

(Aluminium alloy rim)

01398 95,00

○ 4" Active Soft (wide)

(Aluminium alloy rim)

03943 95,00

○ 5" Active Soft (wide)

(Aluminium alloy rim)

07518 95,00

○ 5" Pneumatic

10844 68,00

Rear wheels

☆ 24" Ultra-light Progeo - Standard!

□ 22" Ultra-light Progeo - Standard!

□ 25" Ultra-light Progeo - Standard!

(colour: black)

□ 26" Progeo - Standard!

(colour: black)

○ 24" ULTRA-LIGHT PROGEO KEY SPORT

Lightest configuration

04383 695,00

○ 24" Ultra-light "Spinergy LX"

01685 695,00

○ 24" Ultra-light "Spinergy LXL"

□ Black hub and white spokes

□ Hub and spokes black

07846 695,00

○ 24" Ultra-light "Spinergy Flex rim"

Integrated aluminium/rubber handrim

02270 1.150,00

○ 25" Ultra-light "Spinergy LX"

02101 695,00

○ 25" Ultra-light "Spinergy LXL"

□ Black hub and white spokes

07847 695,00

○ 26" Ultra-light "Spinergy LX"

02102 695,00

○ 24" Off-road (aluminium handrim black)

01392 270,00

Rear wheel tyre

☆ High pressure tyre

(22"-24"-25"-26")

Lightest configuration

□ High pressure profile tyre

(24")

○ Marathon Plus

(24"-25")

with anti-puncture protection

01669 95,00

○ Anti-puncture - Colour Grey

(22")

04181 105,00

○ Anti-puncture - Colour Black

(24")

11083 95,00

Not available with Rear wheels : 24" ULTRA-LIGHT PROGEO KEY SPORT, 24" Ultra-light "Spinergy LXL"

Date Order User Address




Handrim	Wheel distance ★ 3 cm	□ 4 cm		
☆ Aluminium	(22"-24"-25"-26")	<i>Lightest configuration</i>		
○ Aluminium black SOFT-TOUCH	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	09170	160,00
○ Chromed Steel	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	01684	160,00
○ Titanium	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00016	290,00
○ Ultra Grepp	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00017	290,00
○ TOP FRICTION	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11023	290,00
○ Oval countour with a rubber insert				
○ NOVA H	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11025	290,00
○ Ergonomic black profile				
○ NOVA D	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11026	290,00
○ Ergonomic profile with rubber coating (ideal for quadriplegics)				
○ Silicon cover for standard aluminium handrim		Available for measures (22"- 24" - 26")	04050	172,00
Wheel locks				
☆ Bent lever push to lock				
□ Straight lever push to lock				
□ Straight lever pull to lock				
○ Sport brake				06428 135,00
○ Brake with extension lever push to lock				01949 68,00
○ Brake with extension lever pull to lock				03372 68,00
Armrests				
○ Tubular armrests	(Swing away, removable and height adjustable armrest)			00694 270,00
○ Removable armrest with carbon-fiber straight sideguard	The distance between the two side guards is 1 cm wider than the seat width			09079 240,00
Accessories				
○ Pad for front frame protectors				07058 56,00
○ Backrest-seat connection cloth				10241 25,00
○ Removable storage bag (with quick coupling)				09811 135,00
Optional 1				
<u>Only one optional devices for side can be chosen</u>				
○ Transit wheels	Exclude the installation of Anti-tippers			03290 158,00
○ Anti-tipper with rapid hookup	Exclude the installation of Transit wheels (inside rotation to reduce the encumbrance)			06821 145,00
	○ Right			06822 145,00
	○ Left			
Optional 2				
○ Push handles for companion	(Removable and height adjustable)			03645 189,00
○ Tetraclick	(Quick release axle for quadriplegic)			03947 189,00
○ Safety pelvic belt				03972 68,00
○ Harness				04103 145,00
○ Lumbar support	(to insert in the backrest upholstery)			00013 43,00
○ Swing away lateral support	Not available with Posture backrest PHYSIO - Posture backrest A I R			02097 270,00
○ Prevents backrest folding				02098 270,00
○ Spoke guards Black	(22"-24")			01043 158,00
○ Spoke guards Transparent	(22"-24")			00835 158,00
○ Spoke guards Progeo design	(22"-24")			00019 189,00
Additional Kit				
○ 24" Off-road rear wheels	Off-Road tyre - aluminium handrim (black colour)		03378	534,00
○ 24" FAT rear wheels	FAT tyre 3" - aluminium handrim (black colour)		09357	895,00

Date.....Order.....User.....Address.....

PHYSIO - Posture backrest
(Std. Backrest upholstery not provided)



Removable with quick release
Suitable for tubes with diameter 18÷26mm
Depth adjustment (4cm)
Angle adjustment (±18°)

☐ **AIR** Carbon shell
not available for seat width 48

BACKREST HEIGHT		28		34		40	
Shell's shape		Lateral retaining wing A=high - R=regular					
7,5 cm 	A	R	A	R	A	R	
							
	☐	☐	☐	☐	☐	☐	

1.121,00

☐ **POSTURE** Aluminum shell

BACKREST HEIGHT	34	40	52
Shell's shape	Lateral retaining wing R=regular		
	R	R	R
			
	☐	☐	☐

1.085,00

Configuration DEEP with side support PAD (height adjustable)

Alluminum lateral with padded, breathable upholstery.



Small (h 13cm)



☐ Right
10272

49,00



☐ Left
10272

49,00

Large (h 20cm)



☐ Right
10273

49,00

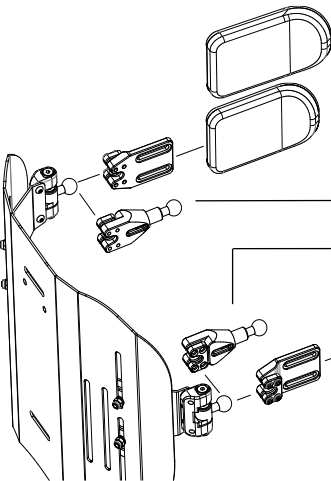


☐ Left
10273

49,00

SWING AWAY - Lateral support

Fixing and adjustment hardware complete with protection sleeve
Alluminum lateral with padded, breathable upholstery.



☐ Large (18x12)

05647 196,00

☐ Small (14x9)

05643 196,00

☐ Lateral support extension

Quantity (number pcs).....
10271 74,00

☐ Lateral support extension

Quantity (number pcs).....

☐ Small (14x9)

05642 196,00

☐ Large (18x12)

05646 196,00

☐ Headrest adjustable - Double ball mounting system

Available only with backrest Physio Posture



☐ Large (34x14) 05648 385,00
☐ Small (28x14)

Permobil LimitedUnit 7, Polaris Centre, 41 Brownfields,Welwyn Garden City, Herts. AL7 1ANUnited Kingdom - Phone: +44 1484 722888

Date..... Order..... User..... Address.....

Note

customer_support_uk@permobil.com - https://www.permobil.com/en-gb

Send this page only if any optional have been chosen	
☒	standard (supplied if no requests are indicated)
☐	on request (without extra charge)
☐	optional (cost to be added at the basic price)