

Date

UK (English)

User

Company stamp

End user wheight (kg)

Folding frame wheelchair

Language user manual

Responsible

£ 2750,00

Retail price - VAT not included

Wheelchair measures - The tolerance on all the dimensions indicated and/or required is ± 10 mm

Seat width (LS)

☐ 36 ☐ 39 ☐ 42 ☐ 45 ☐ 48**The seat width is measured from the outer sides of the frame****For seat enlargement see section enlargement of mudguard and armrest with integrated mudguard**

Seat depth (PS)

☐ 37,5 ☐ 40 ☐ 42,5 ☐ 45 ☐ 47,5**The real seat depth, from the front part of the seat cloth to the backrest tube will be 1 cm more than the declared one. - calculated with angle backrest 90° to the seat**

Footplate distance (DP)

..... (cm) ± 0.5 cm - adjustment steps 1.5cm**(Real distance between seat and footplate) - IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)**

Setting

☆ Standard ☐ Prudential ☐ Active

camber

☆ 2° ☐ 0° ☐ 4°

Backrest Height (TS)

Std.Value 33,5(min 24.5-max 47) adjustment steps 1.5cm



Backrest angle (to the seat)

☆ 90° ☐ -6° ☐ 6°

Front height (STD 49) - Rear height (STD 43)

Front frame

☆ Aluminium standard frame Angle 100°

☐ Short frame - Ideal with Seat depth (PS)37,5 - 40☐ Long frame - Ideal with Seat depth (PS)42,5 - 45 - 47,5☐ Aluminium frame Angle 90° - (max 5" caster)☐ Short frame - Ideal with Seat depth (PS)37,5 - 40☐ Long frame - Ideal with Seat depth (PS)42,5 - 45 - 47,5

Frame colour

☆ Opaque black

☐ Tekno anthracite☐ Matt grey☐ POLAR white☐ Matt Midnight blue☐ Matt red☐ Matt orange

Backrest

☆ Adjustable velcro straps and padded transpiring upholstery

Handle tube

☆ Tubes with standard handle

☐ Folding handles

Not available with: Push handles for companion, Brake handles for companion (Drum Brake)



02958 270,00

Casters

☆ 4" Soft

☐ 3" Sport☐ 5" Soft☐ 6" Soft☐ 6" Pneumatic☐ 3" Active Soft (wide)☐ 4" Active Sport (narrow)☐ 4" Active Soft (wide)☐ 5" Active Soft (wide)☐ 5" Pneumatic

Lightest configuration

(Available only with 100° angle)

(Available only with 100° angle)

(Aluminium alloy rim)

(Aluminium alloy rim)

(Aluminium alloy rim)

(Aluminium alloy rim)

06824 95,00

01398 95,00

03943 95,00

07518 95,00

10844 68,00

Support front fork

☆ Standard support front fork

☐ Front fork support V Design 2.0

Exclude the installation of QUICK RELEASE FRONT FORKS



06850 158,00

Date Order User Address

Colour set: Includes rear wheel hub and rim, rear wheel plates and front forks

Only standard Progeo 22"/24" wheels have coloured hubs and rims

☆ Black	22" 24" 25" 26"		
○ Bright silver	22" 24"	00833	135,00
○ Bright lime	22" 24"	00833	135,00
○ Bright blue	22" 24"	00833	135,00
○ Bright red	22" 24"	00833	135,00
○ Bright fuchsia	22" 24"	00833	135,00
○ POLAR white	22" 24"	00833	135,00
○ Tekno anthracite	22" 24"	00833	135,00
○ Matt Midnight blue	22" 24"	00833	135,00
○ Matt grey	22" 24"	00833	135,00
○ Matt red	22" 24"	00833	135,00

Rear wheels

☆ 24" Ultra-light Progeo - Standard!			
□ 22" Ultra-light Progeo - Standard!			
□ 25" Ultra-light Progeo - Standard!	(colour: black)		
□ 26" Progeo - Standard!	(colour: black)		
○ 24" ULTRA-LIGHT PROGEO KEY SPORT	Lightest configuration	04383	695,00
○ 24" Ultra-light "Spinergy LX"		01685	695,00
○ 24" Ultra-light "Spinergy LXL"	□ Black hub and white spokes	07846	695,00
○ 24" Ultra-light "Spinergy Flex rim"	Integrated aluminium/rubber handrim	02270	1.150,00
○ 25" Ultra-light "Spinergy LX"		02101	695,00
○ 25" Ultra-light "Spinergy LXL"	□ Black hub and white spokes	07847	695,00
○ 26" Ultra-light "Spinergy LX"		02102	695,00
○ 24" Off-road (aluminium handrim black)		01392	270,00
○ 24" with brake handles for companion (drum brake) (aluminium handrim - Wheel distance 3cm)		03384	386,00
Available only with: camber 0° and Setting Standard			
○ One arm drive - (24" rear wheels Aluminium handrim High pressure Tyre) - camber 0°			
	○ Right ○ Left	02103	430,00

Rear wheel tyre

☆ High pressure tyre	(22"-24"-25"-26")	Lightest configuration	
□ High pressure profile tyre	(24")		
○ Marathon Plus	(24"-25")	with anti-puncture protection	01669 95,00
○ Anti-puncture - Colour Black	(24")		11083 95,00
Not available with Rear wheels : 24" ULTRA-LIGHT PROGEO KEY SPORT, 24" Ultra-light "Spinergy LXL"			
○ Anti-puncture - Colour Grey	(22")		04181 105,00

Handrim**Wheel distance ☆ 3 cm****□ 4 cm**

☆ Aluminium	(22"-24"-25"-26")	Lightest configuration	
○ Aluminium black SOFT-TOUCH	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	09170 160,00
○ Chromed Steel	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	01684 160,00
○ Titanium	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00016 290,00
○ Ultra Grepp	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00017 290,00
○ TOP FRICTION	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11023 290,00
Oval countour with a rubber insert			
○ NOVA H	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11025 290,00
Ergonomic black profile			
○ NOVA D	(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11026 290,00
Ergonomic profile with rubber coating (ideal for quadriplegics)			
○ Silicon cover for standard aluminium handrim		Available for measures (22"- 24" - 26")	04050 172,00

Wheel locks

☆ Bent lever push to lock			
□ Straight lever push to lock			
□ Straight lever pull to lock			
○ Sport brake			
○ Brake with extension lever push to lock			
○ Brake with extension lever pull to lock			



06428	135,00
01949	68,00
03372	68,00

Date Order User Address

Footplate - See reference tables N°3

- ☆ Automatic Closure footplate rake and depth adjustable

Minimum footplate distance 35cm.

☐ Internal

☆ 2/3

Internal

☐ External

11526

○ Minimum footplate distance 30cm. Available only with Multi-function and rotative system - 03945 203,00

- ☐
- One piece footplate - Flip-up! rake and depth adjustable

Minimum footplate distance 35cm.

☐ Internal

☆ 2/3

Internal

☐ External

11527

○ Minimum footplate distance 30cm. Available only with Multi-function and rotative system - 03945 203,00

- ☐
- One piece aluminium footplate - Flip-up! rake and depth adjustable

Minimum footplate distance 35cm.

☐ Internal

☆ 2/3

Internal

☐ 2/3

External

☐ External

11528

- Plastic footrest rake adjustable


Minimum footplate distance 35cm.

☆ 2/3

Internal

☐ 2/3

External



06861

93,00

Need a stretch calf band.

NOT AVAILABLE WITH FRONT FORK SUPPORT V DESIGN 2.0

- One piece Carbon fibre footplate rake adjustable, swing away, flip-up.

Minimum footplate distance 35cm.

☐ Internal☐ External

03291

294,00

- Footplate COMPACT, automatic Closure, rake and depth adjustable

Minimum footplate distance 35cm.

☆ Internal

☐ External

09957

270,00

Mudguard

Mudguard

- ☆ ABS mudguard

☐ ABS Straight sideguard

○ Carbon fibre mudguard

○ Carbon fibre Straight sideguard



03946

337,00

08918

337,00

Mudguard enlargement

☆ + 0 cm

☐ + 1 cm☐ + 2 cm

Not available with Rear wheels with brake handles for companion (Drum Brake)

12648

Removable version

The distance between the two side guards is 1 cm wider than the seat width

○ Removable ABS mudguard

○ Removable ABS fibre straight sideguard

○ Removable carbon fibre mudguard

○ Removable Carbon fibre straight sideguard



08921

135,00

08921

135,00

08919

466,00

08920

466,00

Armrests

- Tubular armrests - Steel support with safety locking system

(Swing away, removable and height adjustable armrest)

Not available with anti-tippers if the rear seat height is less than 40cm



00694

270,00

Removable armrest with integrated mudguard

- Desk armrests PROGEO

(Removable and height adjustable)



09956

240,00

Enlargement of Desk armrests PROGEO

☆ + 0 cm

☐ + 2 cm

Available only with Ultra-light Progeo standard wheels and camber 0° or 2°

12648

- Removable armrest with ABS straight sideguard

The distance between the two side guards is 1 cm wider than the seat width

- Removable armrest with carbon-fiber straight sideguard

The distance between the two side guards is 1 cm wider than the seat width

08881

240,00

08882

486,00

Accessories

- Pad for front frame protectors

07058

56,00

- Backrest-seat connection cloth

10241

25,00

- Removable storage bag (with quick coupling)

09811

135,00

Date Order User Address

Optional 1

Only one optional devices for side can be chosen

☐ Transit wheels	Exclude the installation of : Anti-tippers - Tipping aid - Crutches support		00836	158,00
☐ Anti-tipper with rapid hookup	(inside rotation to reduce the encumbrance) ☐ Right ☐ Left		00023 00024	145,00 145,00
☐ Tipping aid	☐ Right ☐ Left		00025 01046	79,00 79,00
☐ Crutches support	☐ Right ☐ Left		00838 00837	79,00 79,00

Optional 2

☐ Tetraclip	(Quick release axle for quadriplegic)		03947	189,00
☐ Quick release front forks	To be matched only with: Standard support front fork		00030	158,00
☐ Push handles for companion	(Removable and height adjustable)		01048	203,00
☐ Safety pelvic belt			03972	68,00
☐ Harness			04103	145,00
☐ Lumbar support	(to insert in the backrest upholstery)		00013	43,00
☐ Swing away lateral support Not available with Posture backrest PHYSIO	☐ Right ☐ Left		02097 02098	270,00 270,00
☐ Spoke guards Black	(22"-24")		01043	158,00
☐ Spoke guards Transparent	(22"-24")		00835	158,00
☐ Spoke guards Progeo design	(22"-24")		00019	189,00

Additional Kit


☐ 24" Off-road rear wheels	Off-Road tyre - aluminium handrim (black colour)	03378	534,00
☐ 24" FAT rear wheels	FAT tyre 3" - aluminium handrim (black colour)	09357	895,00

Date.....Order.....User.....Address.....

PHYSIO - Posture backrest
(Std. Backrest upholstery not provided)




Removable with quick release
Suitable for tubes with diameter 18÷26mm
Depth adjustment (4cm)
Angle adjustment (±18°)

☐ **AIR** Carbon shell
not available for seat width 48

BACKREST HEIGHT		28		34		40	
Shell's shape		Lateral retaining wing A=high - R=regular					
7,5 cm 	A	R	A	R	A	R	
							
	☐	☐	☐	☐	☐	☐	

1.121,00

☐ **POSTURE** Aluminum shell

BACKREST HEIGHT	34	40	52
Shell's shape	Lateral retaining wing R=regular		
	R	R	R
			
	☐	☐	☐

1.085,00

Configuration DEEP with side support PAD (height adjustable)

Alluminum lateral with padded, breathable upholstery.



Small (h 13cm)



☐ Right 10272 49,00
☐ Left 10272 49,00

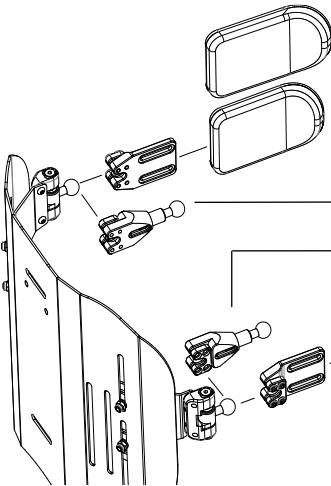
Large (h 20cm)



☐ Right 10273 49,00
☐ Left 10273 49,00

SWING AWAY - Lateral support

Fixing and adjustment hardware complete with protection sleeve
Aluminum lateral with padded, breathable upholstery.



☐ Large (18x12)
☐ Small (14x9)

☐ Lateral support extension
☐ Lateral support extension

☐ Small (14x9)
☐ Large (18x12)

Quantity (number pcs).....
10271 74,00

05642 196,00

05646 196,00

☐ Headrest adjustable - Double ball mounting system
Available only with backrest Physio Posture



☐ Large (34x14) 05648 385,00
☐ Small (28x14)

customer_support_uk@permobil.com - https://www.permobil.com/en-gb

Permobil LimitedUnit 7 , Polaris Centre, 41 Brownfields,Welwyn Garden City, Herts, AL7 1ANUnited Kingdom - Phone: +44 1484 722888

Date	Order	User	Address
------------	-------------	------------	---------------

Note

customer_support_uk@permobil.com - https://www.permobil.com/en-gb

Wheelchair : Progeo TEKNA ADVANCE - Rev. 2025.1	Prices - VAT excluded to be added to the price list	Send this page only if any optional have been chosen	
		☐ standard	(supplied if no requests are indicated)
		☐ on request	(without extra charge)
		☐ optional	(cost to be added at the basic price)

REFERENCE TABLES

1	Front height			
With closed frame (95°) max 5" caster With closed frame (90°) max 5" caster With closed frame (85°) max 4" caster				
FORK	Casters			
	3"	4"	5"	6"
SMALL 	max 49	max 50	max 51	
MEDIUM 	max 53	max 54	max 55	max 57
The size of the fork will be defined only by Progeo in accordance with wheelchair final configuration.				

2	Rear height			
	Rear wheels			
	22"	24"	25"	26"
H min	min. 36	min. 38	min. 39	min. 40
H max	max 44	max 48	max 49	max 51

3	Footplate option	Footplate distance
	Automatic Closure footplate	min. 36
	Automatic Closure footplate , with multifunction rotative system	min. 31
	One piece footplate - Flip-up!	min. 36
	One piece footplate - Flip-up!, with multifunction rotative system	min. 31
	One piece aluminium footplate - Flip-up!	min. 36
	Plastic footrest	min. 36
	One piece Carbon fibre footplate	min. 36
Calculated with the best configuration and with the footplates positioned on inside.		
IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)		

4	Rear wheels	
	Model	Features
	22" Ultra-light Progeo - Standard!	(not available in anthracite color)
	24" Ultra-light Progeo - Standard!	(available for all coulors)
	24" ULTRA-LIGHT PROGEO KEY SPORT	(silver hub, black rim and 16 spokes)
	24" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	24" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes) - (black hub, rim and 18 spokes)
	24" Ultra-light "Spinergy Flex rim"	(silver hub, black rim and spokes) - (integrated aluminium/rubber handrim - encumbrance reduction up to 3cm. - all tyre)
	24" Off-road	(colour: black) - (aluminium handrim - tyre Off-road)
	25" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	25" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes)
	26" Progeo - Standard!	(colour: black)
	26" Ultra-light "Spinergy LX"	(silver hub, black rim and 18 spokes)