


# ORDER FORM

<b>Company/Customer ID:</b>		<b>P.O. Number:</b>	<b>Date:</b>
<b>Contact person:</b>		<b>Other delivery address/Company:</b>	
<b>Street address:</b>		<b>Street address:</b>	
<b>City and Post Code:</b>		<b>City and Post Code:</b>	
<b>TEL:</b>	<b>E-Mail:</b>	<b>Remark:</b>	

## PAWS POWER ASSISTED WHEELCHAIR SYSTEM

- 3 models
- 6 functions
- more than 30 pending patents!

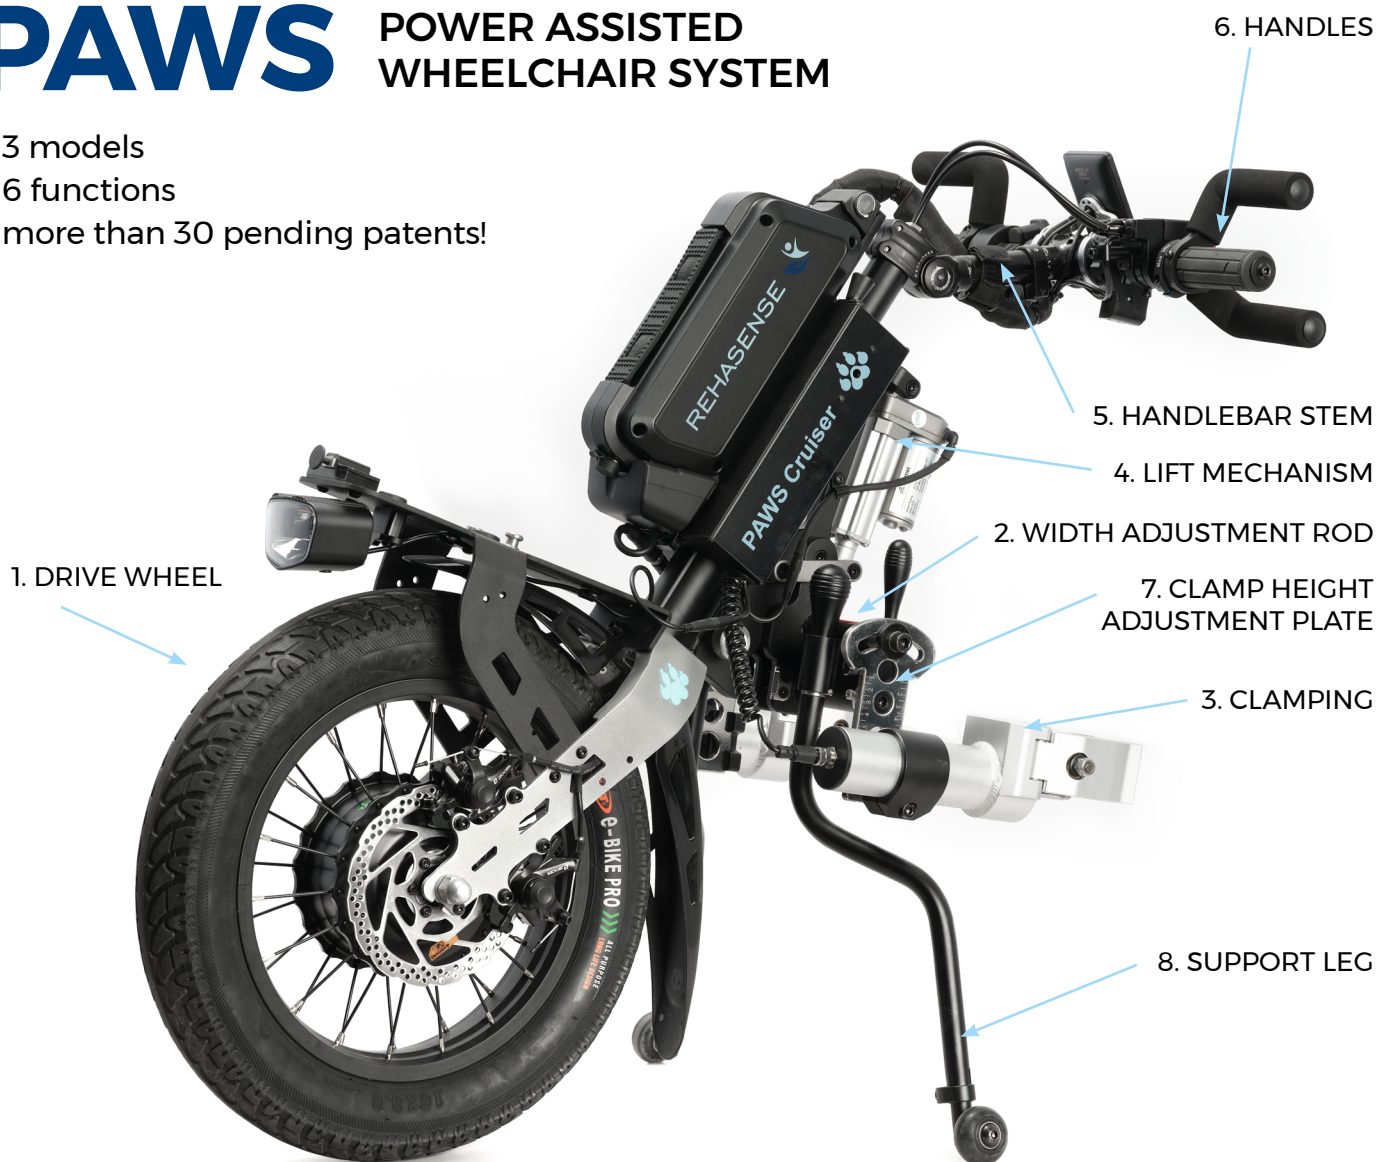

<b>User Information:</b>	
<b>Name:</b>	
<b>Wheelchair Brand/Model:</b>	<b>Front Tube Diameter:</b>
<b>Weight User/Wheelchair (complete with wheels/cushion):</b>	

### 1. DRIVE WHEEL

Pictures	Description	Price	Choice
<b>CITY 12"</b> 	Motor: 350W Battery: 48V, 11.6Ah (557Wh) Medium patterned tire 12 1/2" x 2 1/4", black	<b>RPI12MMS00</b> £ 3995	Manual/Manual
		<b>RPI12AAS00</b> £ 4995	Auto/Auto
		<b>RPI12AAT00</b> £ 5395	Auto/Auto Tetra
<b>CITY 14"</b> 	Motor: 350W Battery: 48V, 11.6Ah (557Wh) Block patterned tire 3.00"-8", black	<b>RPI14MMS00</b> £ 4200	Manual/Manual
		<b>RPI14AAS00</b> £ 5200	Auto/Auto
		<b>RPI12AAT00</b> £ 5600	Auto/Auto Tetra
<b>CRUISER 16"</b> 	Motor: 500W Battery: 48V, 11.6Ah (557Wh) Medium patterned tire 16" x 3.0", black	<b>RPC16MMS00</b> £ 4600	Manual/Manual
		<b>RPC16AAS00</b> £ 5600	Auto/Auto
		<b>RPC16AAT00</b> £ 6000	Auto/Auto Tetra
<b>TOURER "FAT" 20"</b> 	Motor: 500W Battery: 48V, 11.6Ah (557Wh) Block patterned tire 20"x 4", black	<b>RPT20MMS00</b> £ 4995	Manual/Manual
		<b>RPT20AAS00</b> £ 5995	Auto/Auto

### 2. FRAME CLAMPING WIDTH RANGE

Pictures	Description	Price	Choice
	Narrow - 60mm length Width Adjustment Rod (For wheelchair legrest hanger center width range: 260-320mm)	£ 0	
	Mid - 90mm length Width Adjustment Rod (For wheelchair legrest hanger center width range: 320-390mm)	£ 0	
	Wide - 125mm length Width Adjustment Rod (For wheelchair legrest hanger center width range: 380-440mm)	included	
	Extra Wide - ??mm length Width Adjustment Rod (For wheelchair legrest hanger center width range: 440-530 mm)	£ 0	

**Note:**

- The width must be measured from the center to the center of the front tubes, in the middle of straight piece where the clamps are to be placed.
- Fitting range tolerance: for the maximum deduct 10 mm from the range and for the minimum, add 10 mm to the range.

### 3. CLAMPING

Pictures	Description		Price	Choice
	<b>Manual</b> (Depth Range: 0 mm to 100 mm)	Clamp Lever - Vertical included in Manual	included	
	<b>Auto</b> (Depth Range: 0 mm to 100mm)	Auto clamp - included in Auto	included	

### 4. LIFT MECHANISM

Pictures	Description		Price	Choice
	<b>Manual</b>	Standard (For mid and wide width adjustment rod)	included	
	<b>Auto</b>	Standard (For mid and wide width adjustment rod)	included	

### 5. HANDLEBAR STEM

Pictures	Description	Price	Choice
	<b>Standard</b> (Length Range: 225-260 mm)	included	
	<b>Long</b> (Length Range: 255-310 mm)	TBC Jan 2022	

### 6. HANDLEBAR

Configurations			Price	Choice			
<b>Handlebar - Standard with MANUAL clamping and lifting</b>			Included in Standard Manual clamping and lift				
<b>No.</b>	<b>Functions on the left side:</b>	<b>Specific</b>			<b>No.</b>	<b>Functions on the right side:</b>	<b>Specific</b>
L 1	Handle Grip				R 1	Throttle Handle	
L 2	Brake Handle, left				R 2	Traction Control Switch, Walking Mode Switch and Cruise Button	
L 3	E-Brake, Forward/Reverse Switch, Auto Clamp & Lift Switch Button and Horn				R 3	Brake Handle, right	
4	DM Standard Display		R 4	Power Switch, Speed Mode Button UP/DOWN			
			R 5	Front Light Switch			



Configurations				Price	Choice		
<b>Handlebar - Standard with AUTO clamping and lifting</b>				Included in Standard Auto clamping and lifting			
<b>No.</b>	<b>Functions on the left side:</b>	<b>Specific</b>	<b>No.</b>			<b>Functions on the right side:</b>	<b>Specific</b>
L 1	Handle Grip		R 1			Throttle Handle	
L 2	Brake Handle, left		R 2			Traction Control Switch, Walking Mode Switch and Cruise Button	
L 3	E-Brake, Forward/Reverse Switch, Auto Clamp & Lift Switch Button and Horn		R 3	Brake Handle, right			
4	DM Standard Display		R 4	Power Switch, Speed Mode Button UP/DOWN			
			R 5	Front Light Switch			

<b>Handlebar - Tetra with AUTO clamping and lifting</b>				Included with Auto clamping and lifting with Tetra			
<b>No.</b>	<b>Functions on the left side:</b>	<b>Specific</b>	<b>No.</b>			<b>Functions on the right side:</b>	<b>Specific</b>
L 1	Tetra Brake Handle		R 1			Tetra Throttle Handle	
L 2	Parking Button		R 2			Traction Control Switch, Walking Mode Switch and Cruise Button	
L 3	E-Brake, Forward/Reverse Switch, Auto Clamp & Lift Switch Button and Horn		R 3	Power Switch, Speed Mode Button UP/DOWN			
4	DM Standard Display		R 4	Front Light Switch			

### 7. CLAMP HEIGHT ADJUSTMENT PLAT

Pictures	Description	Price	Choice
	<b>Standard</b> (Vertical Adjustment Range - 45 mm, Total Height: 150 mm, Angular Adjustment Range in Lateral Plane: 65 degrees), Reccomended for 12- 16" Wheels.	included	
	<b>Tall</b> (Vertical Adjustment Range - 125 mm, Total Height: 233 mm, Angular Adjustment Range in Lateral Plane: 65 degrees). Reccomended for 16" - 20" Wheels.	TBC Jan 2022	

### 8. SUPPORT LEG

Pictures	Description		Price	Choice
	<b>Vertical</b> -- Mounted on Lift System - Standard	Clamp Lever - Vertical included in Manual	included	
	<b>Horizontal</b> - Mounted on Front Fork - Option	Auto clamp - included in Auto	included	

### 9. SPEED SETTINGS

Mode	1	2	3	4	5	Reverse	Choice
<b>Max speed default</b> - Up to 8 Mph	2	4	8			2	
<b>Max speed custom (fill)*</b> - Up to 18 Mph	2	4	8	12	18	2	

**Note:**  
 Always drive within your ability to control the device to a safe stop. Using/driving the device at uncontrollable speeds is the user's responsibility and the manufacturer/dealer will deny/refuse any responsibility of accidents or damages to third party.  
 Disclaimer to be signed if custom speed has been set up We herewith advise, that using the PAWS with max. speed-settings higher than 4 Mph is only permitted on public roads in certain countries and otherwise may only be used on private property.  
 In the absence of approval, in accordance with the road traffic laws, the PAWS with speed-settings higher than 4 Mph may not be driven on public roads, bicycle-lanes and pavements.  
 You need to inform yourself about the country specific legislation regarding usage and your legal obligation to insure the PAWS, speed settings higher than 4 Mph (8,12 and 18 Mph). When you're travelling with your PAWS, always check the specific legislation in the respective country.  
 When placing an order for a max. speed-setting higher than 4 Mph please confirm with your signature below, that you have understood the above information and that you only intend the usage of your PAWS on private property.  
 We herewith advise, that using the PAWS with max. speed-settings higher than 4 Mph is only permitted on public roads in certain countries and otherwise may only be used on private property.  
 please confirm with your signature below, that you have understood the above information and that you only intend the usage of your PAWS on private property herewith confirm, that I am aware of the information above, that I will follow strictly the country specific legislation.

<b>Date</b>	<b>Customer Signature</b>
-------------	---------------------------